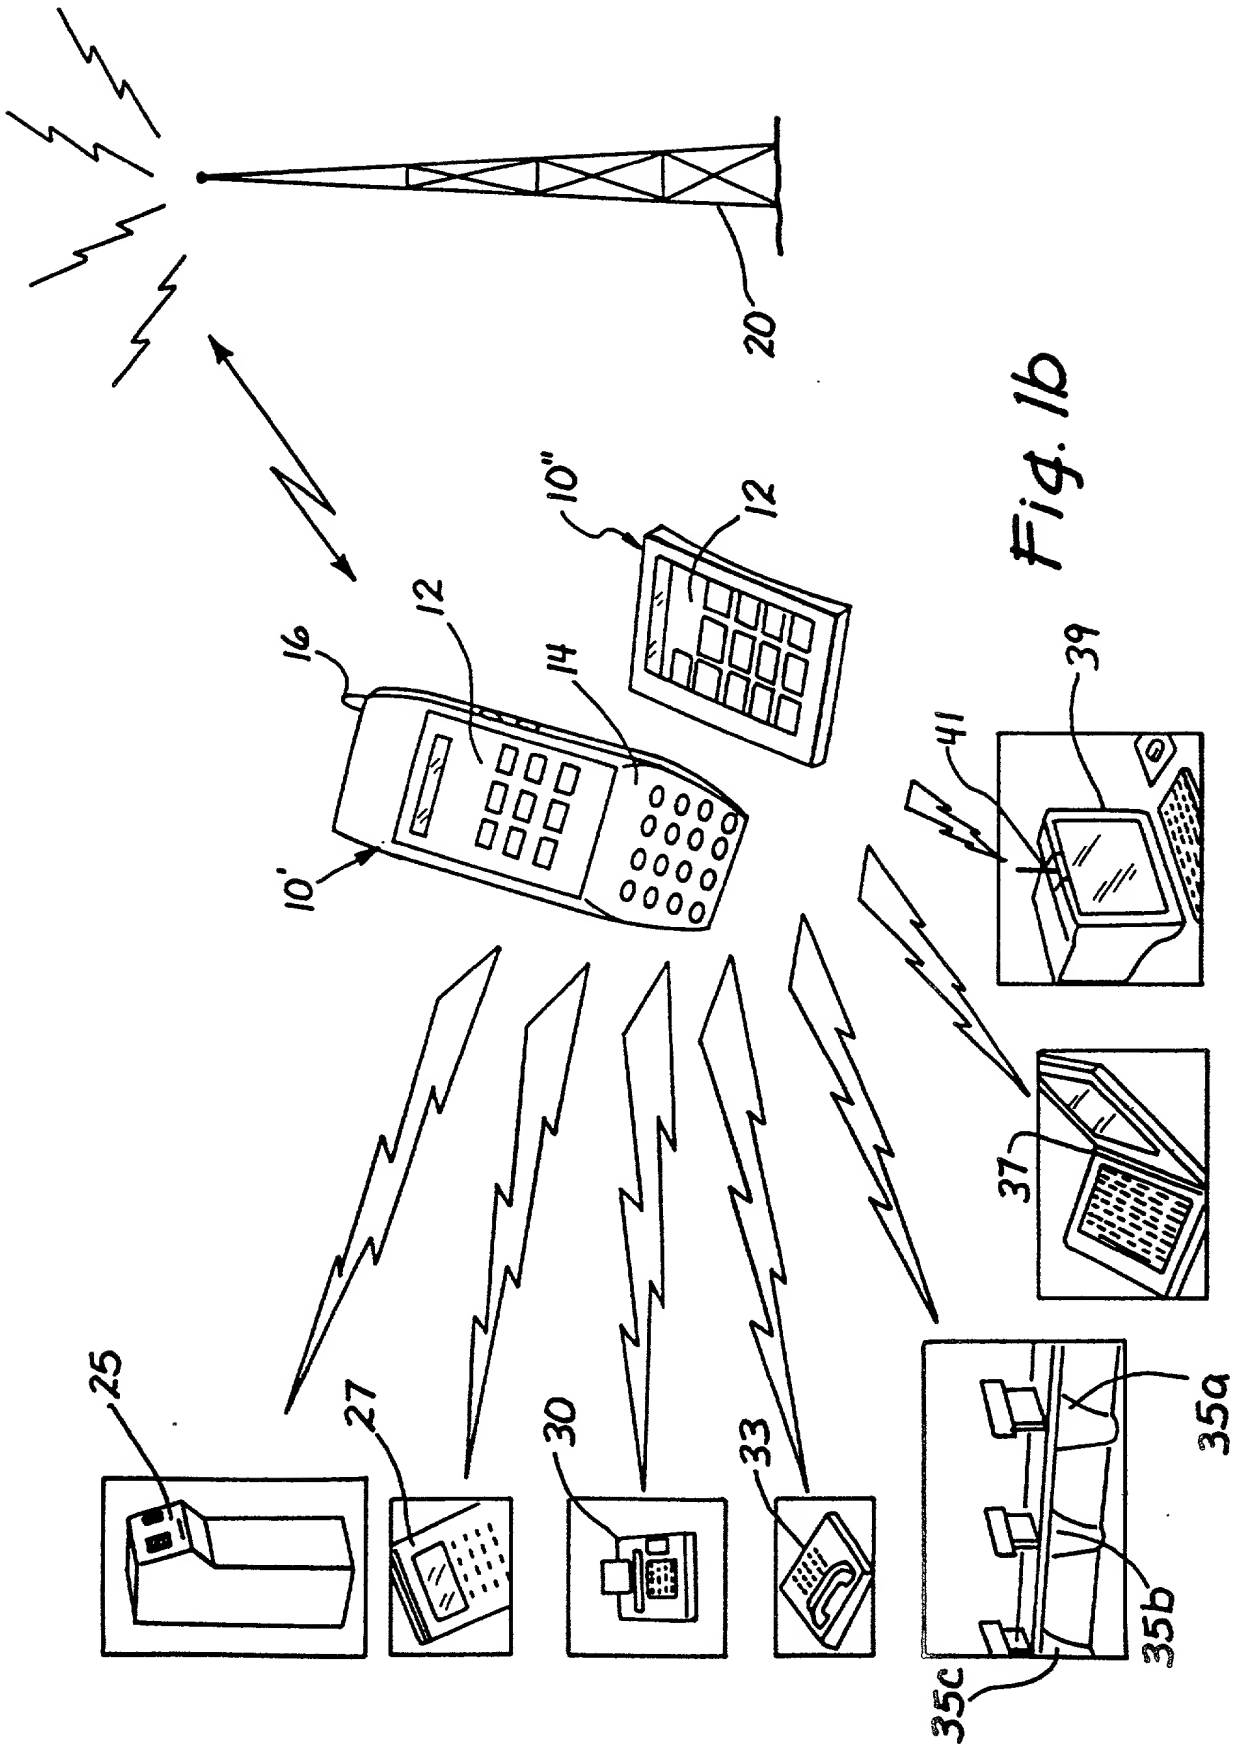
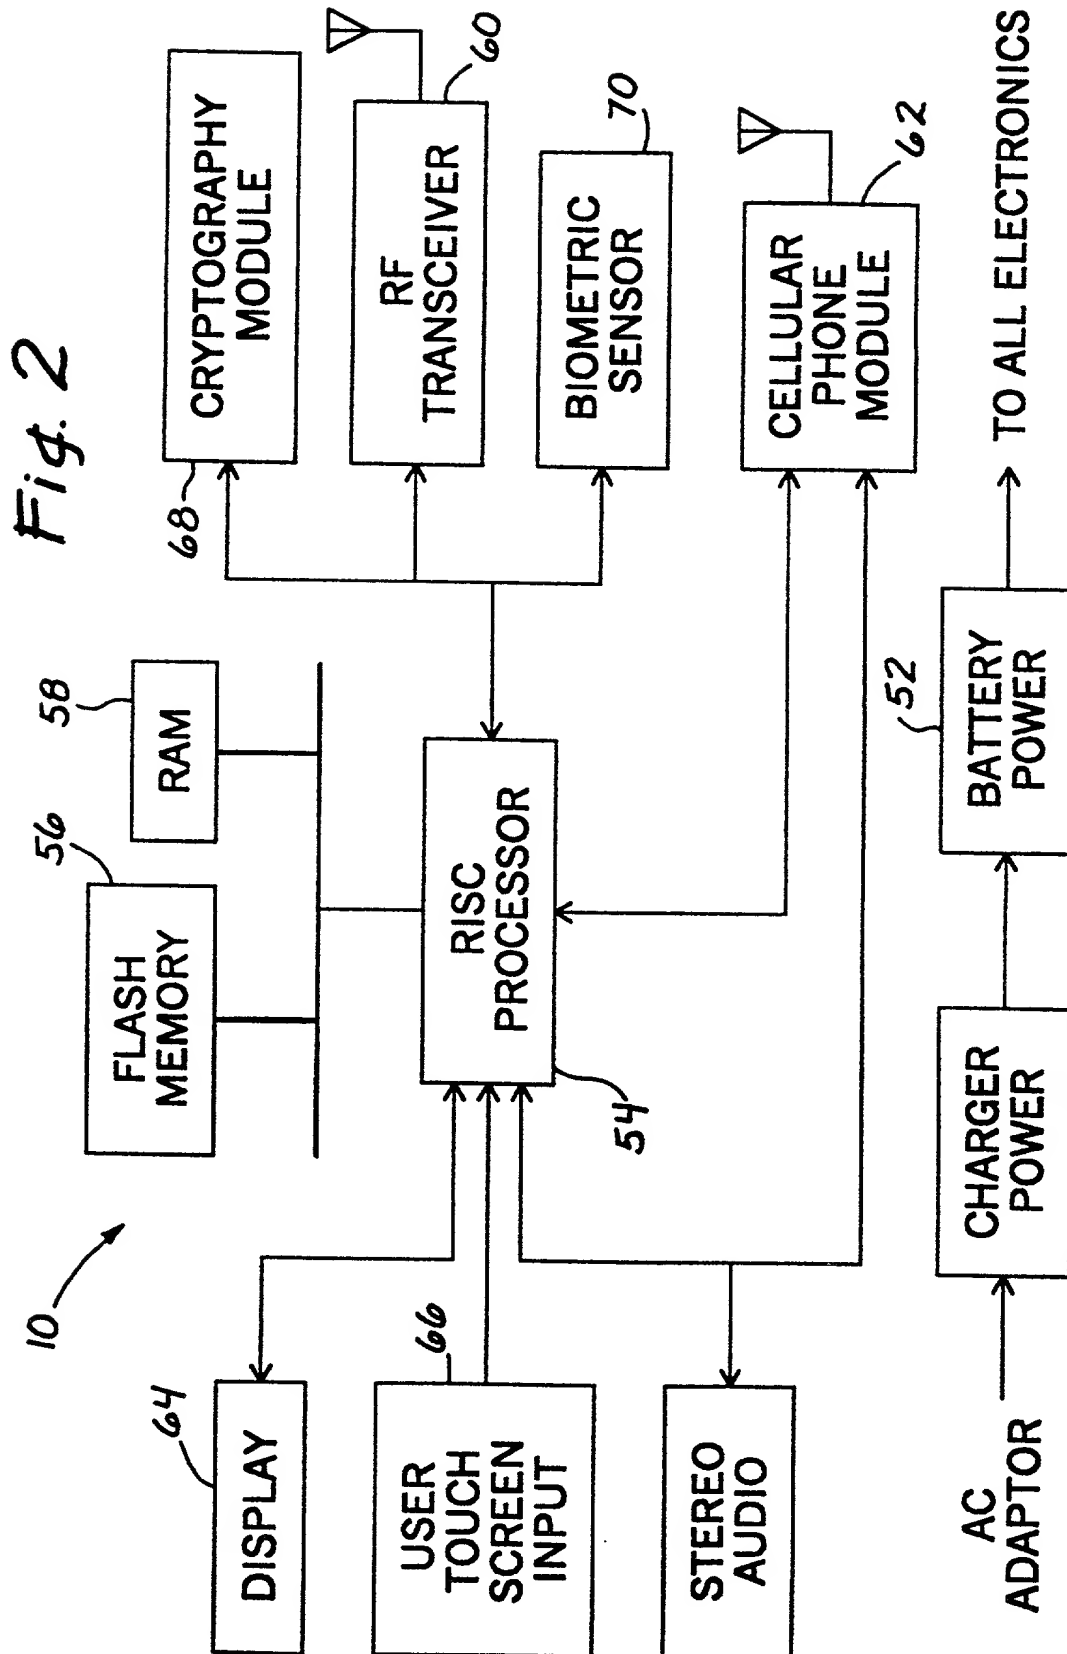


Fig. 1a





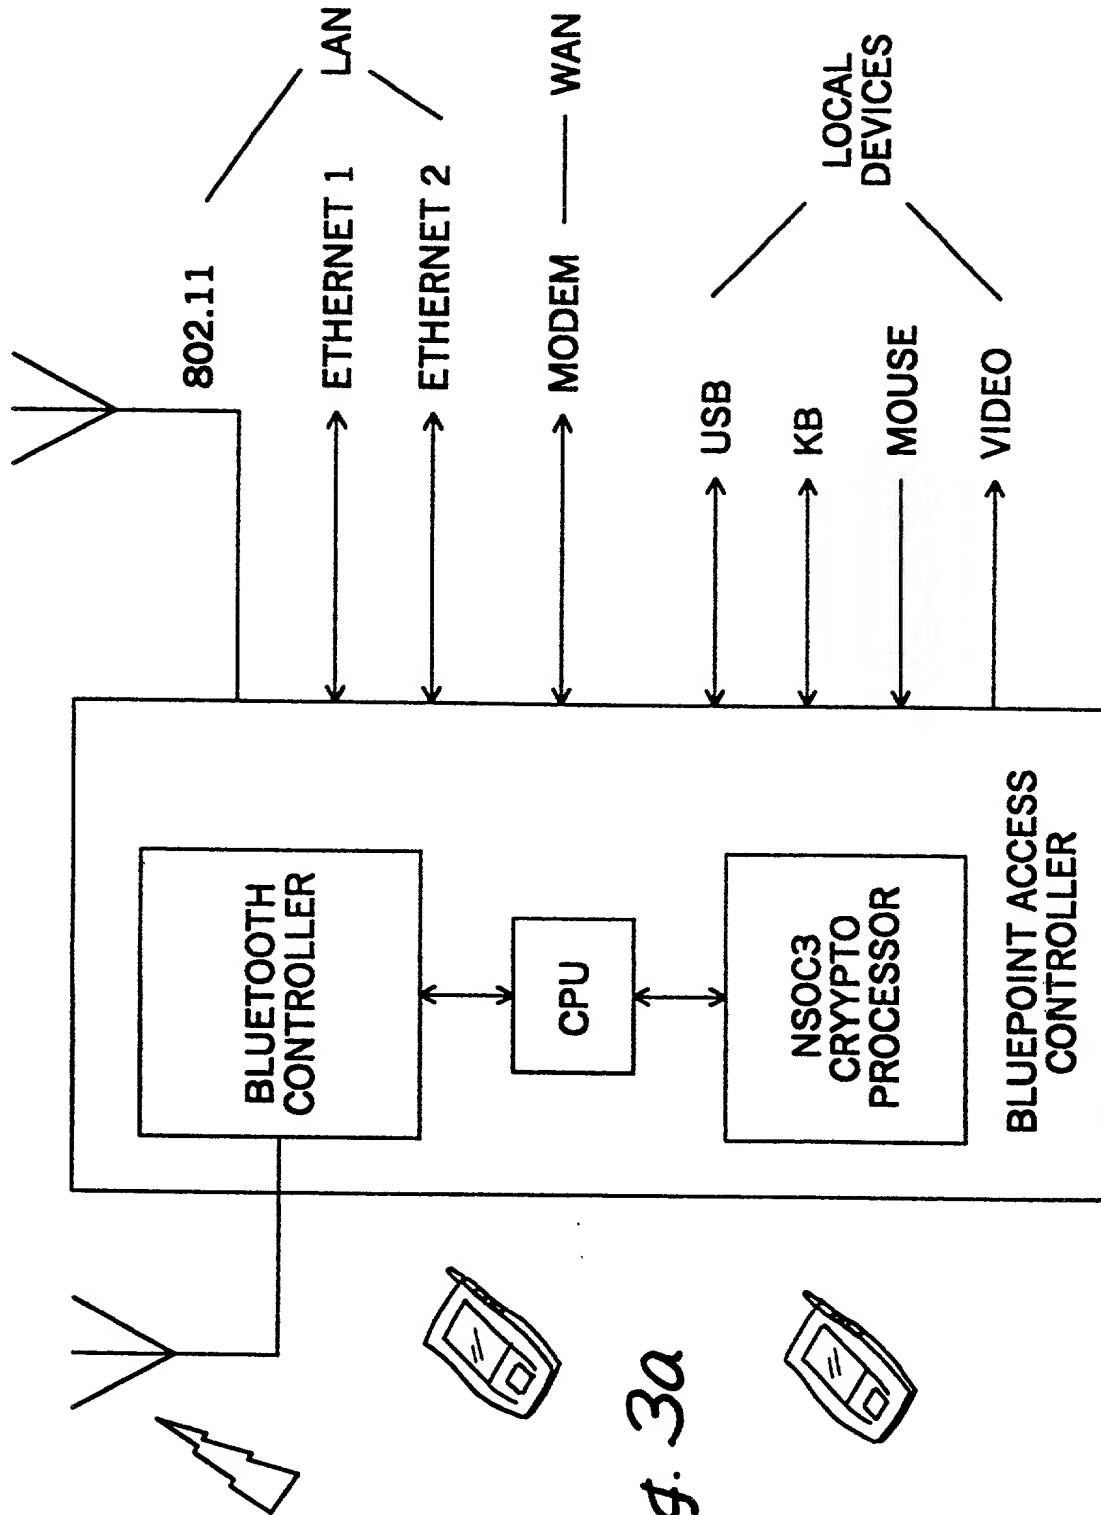
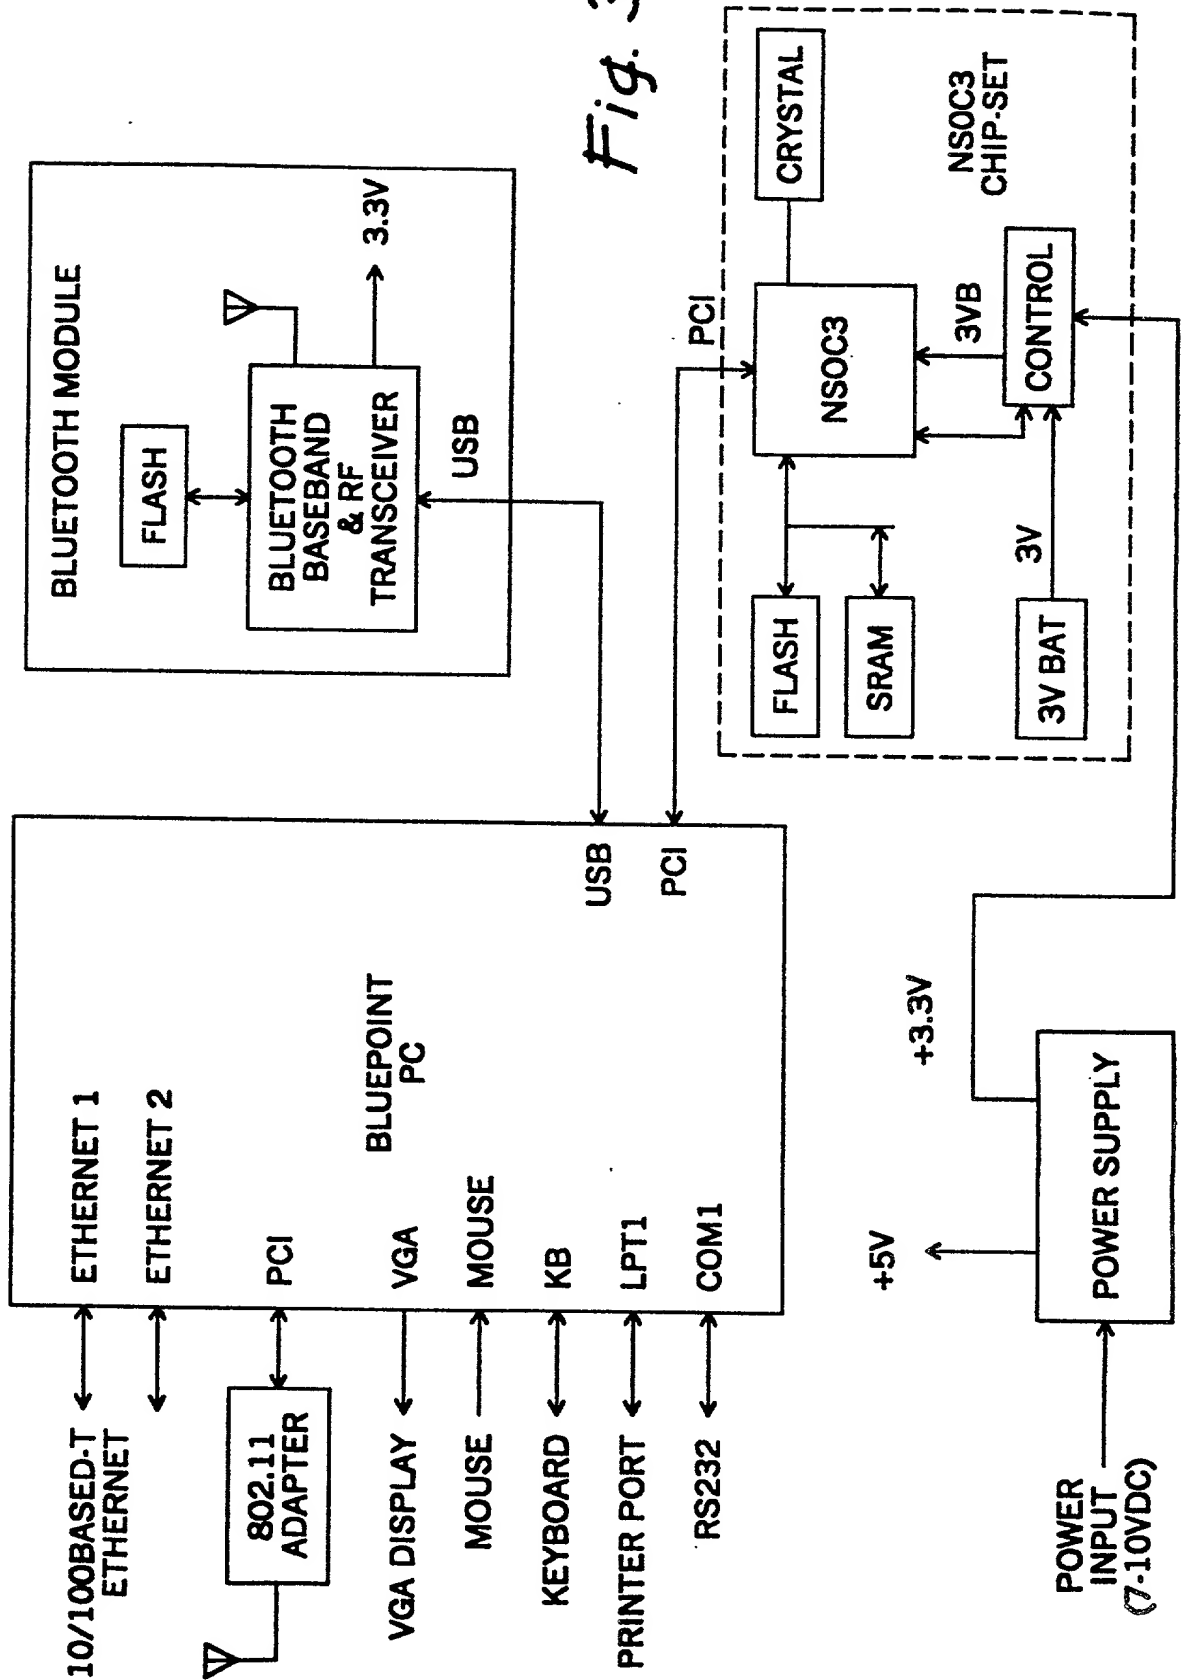


Fig. 3a

Fig. 3b



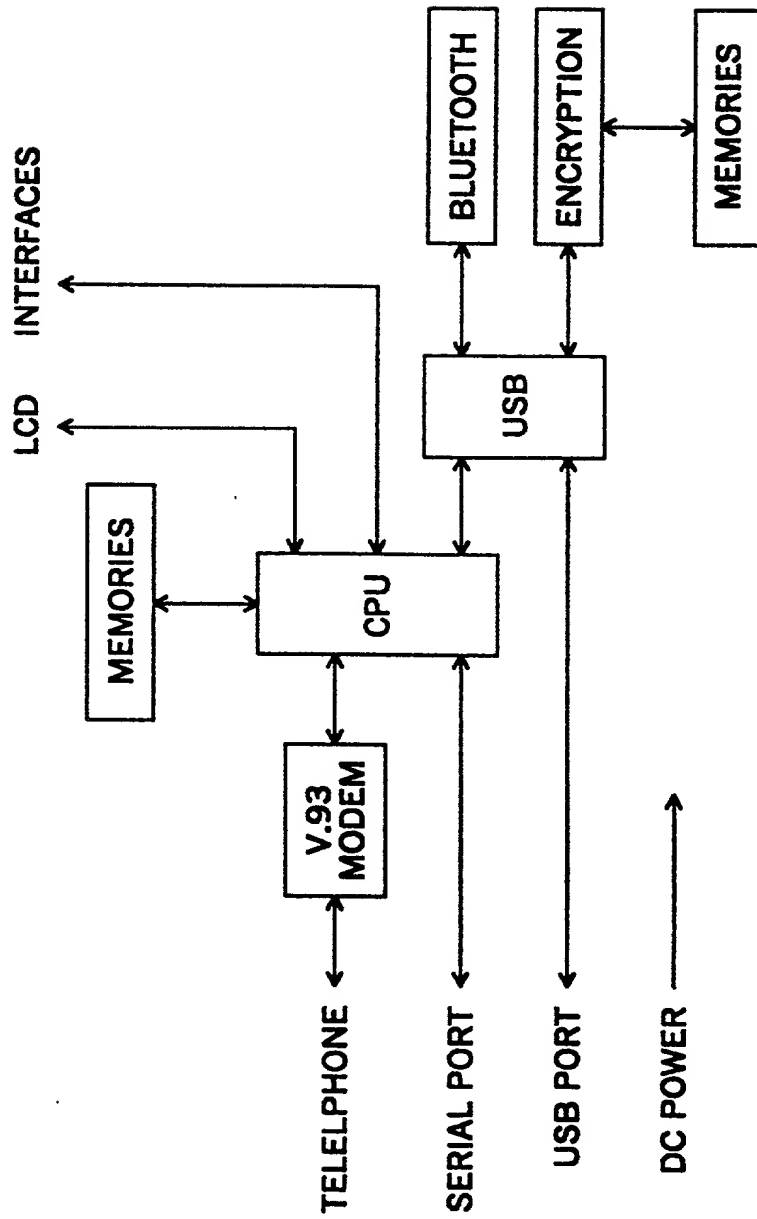


Fig. 4

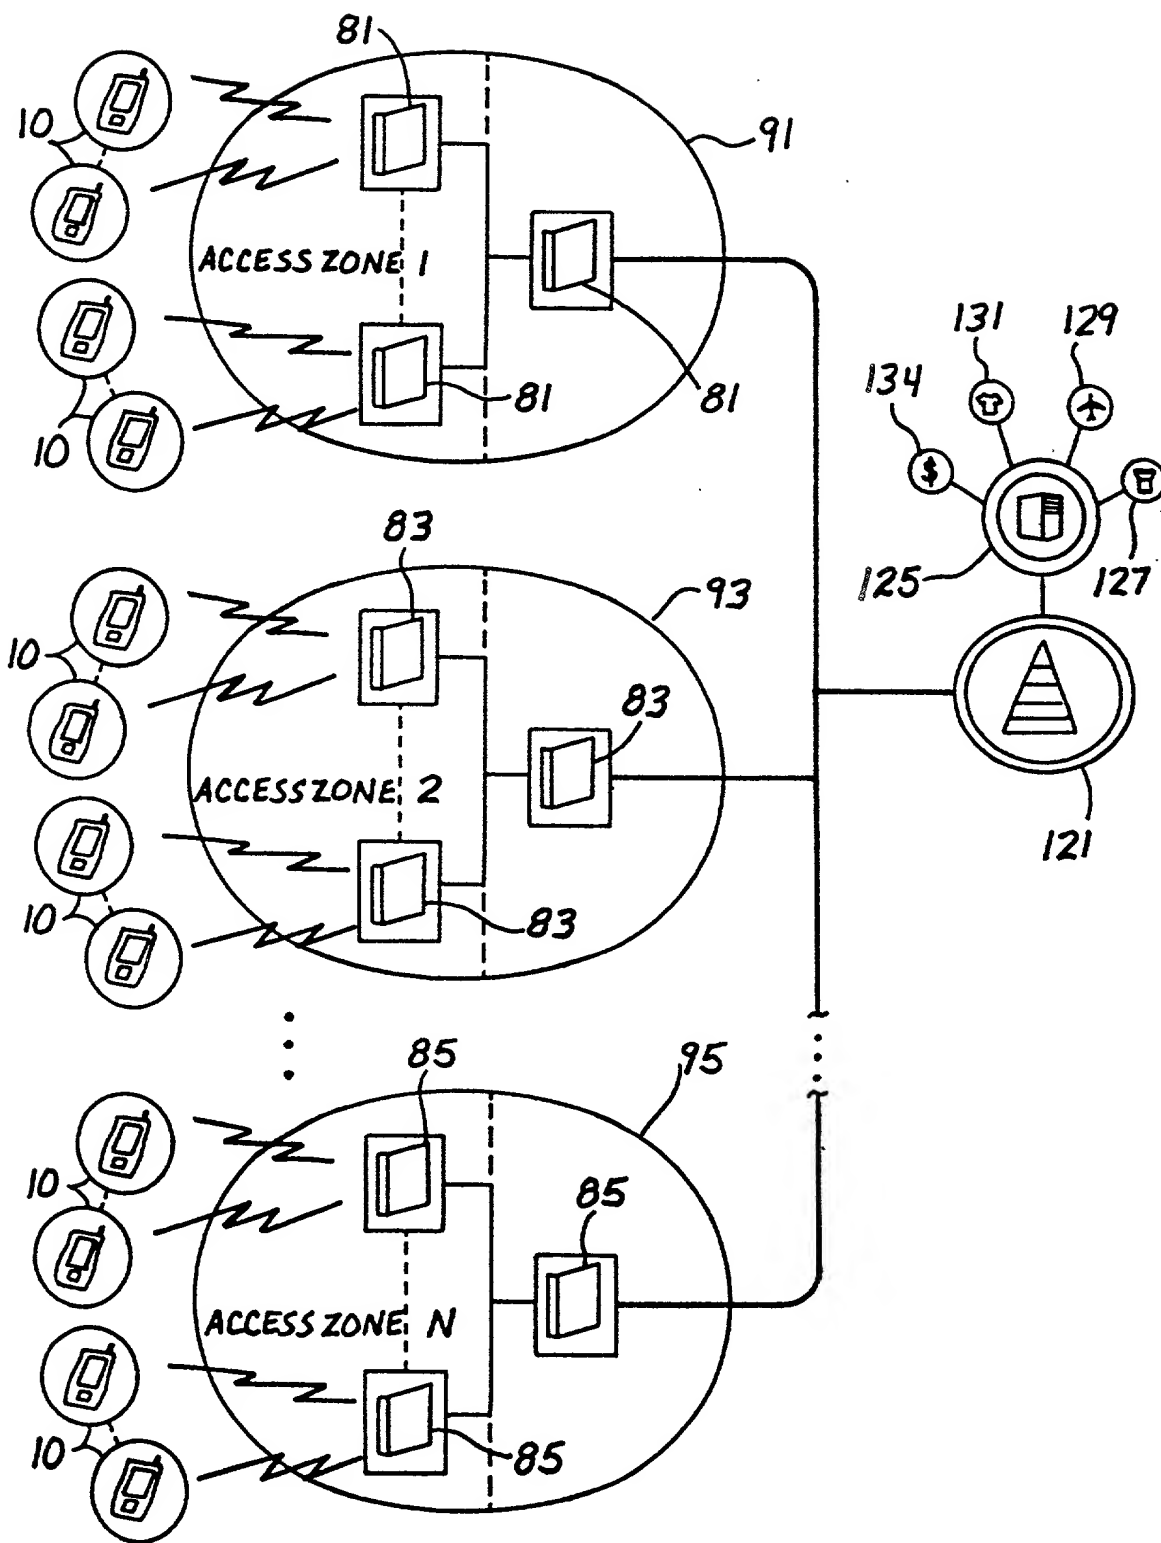


Fig. 5



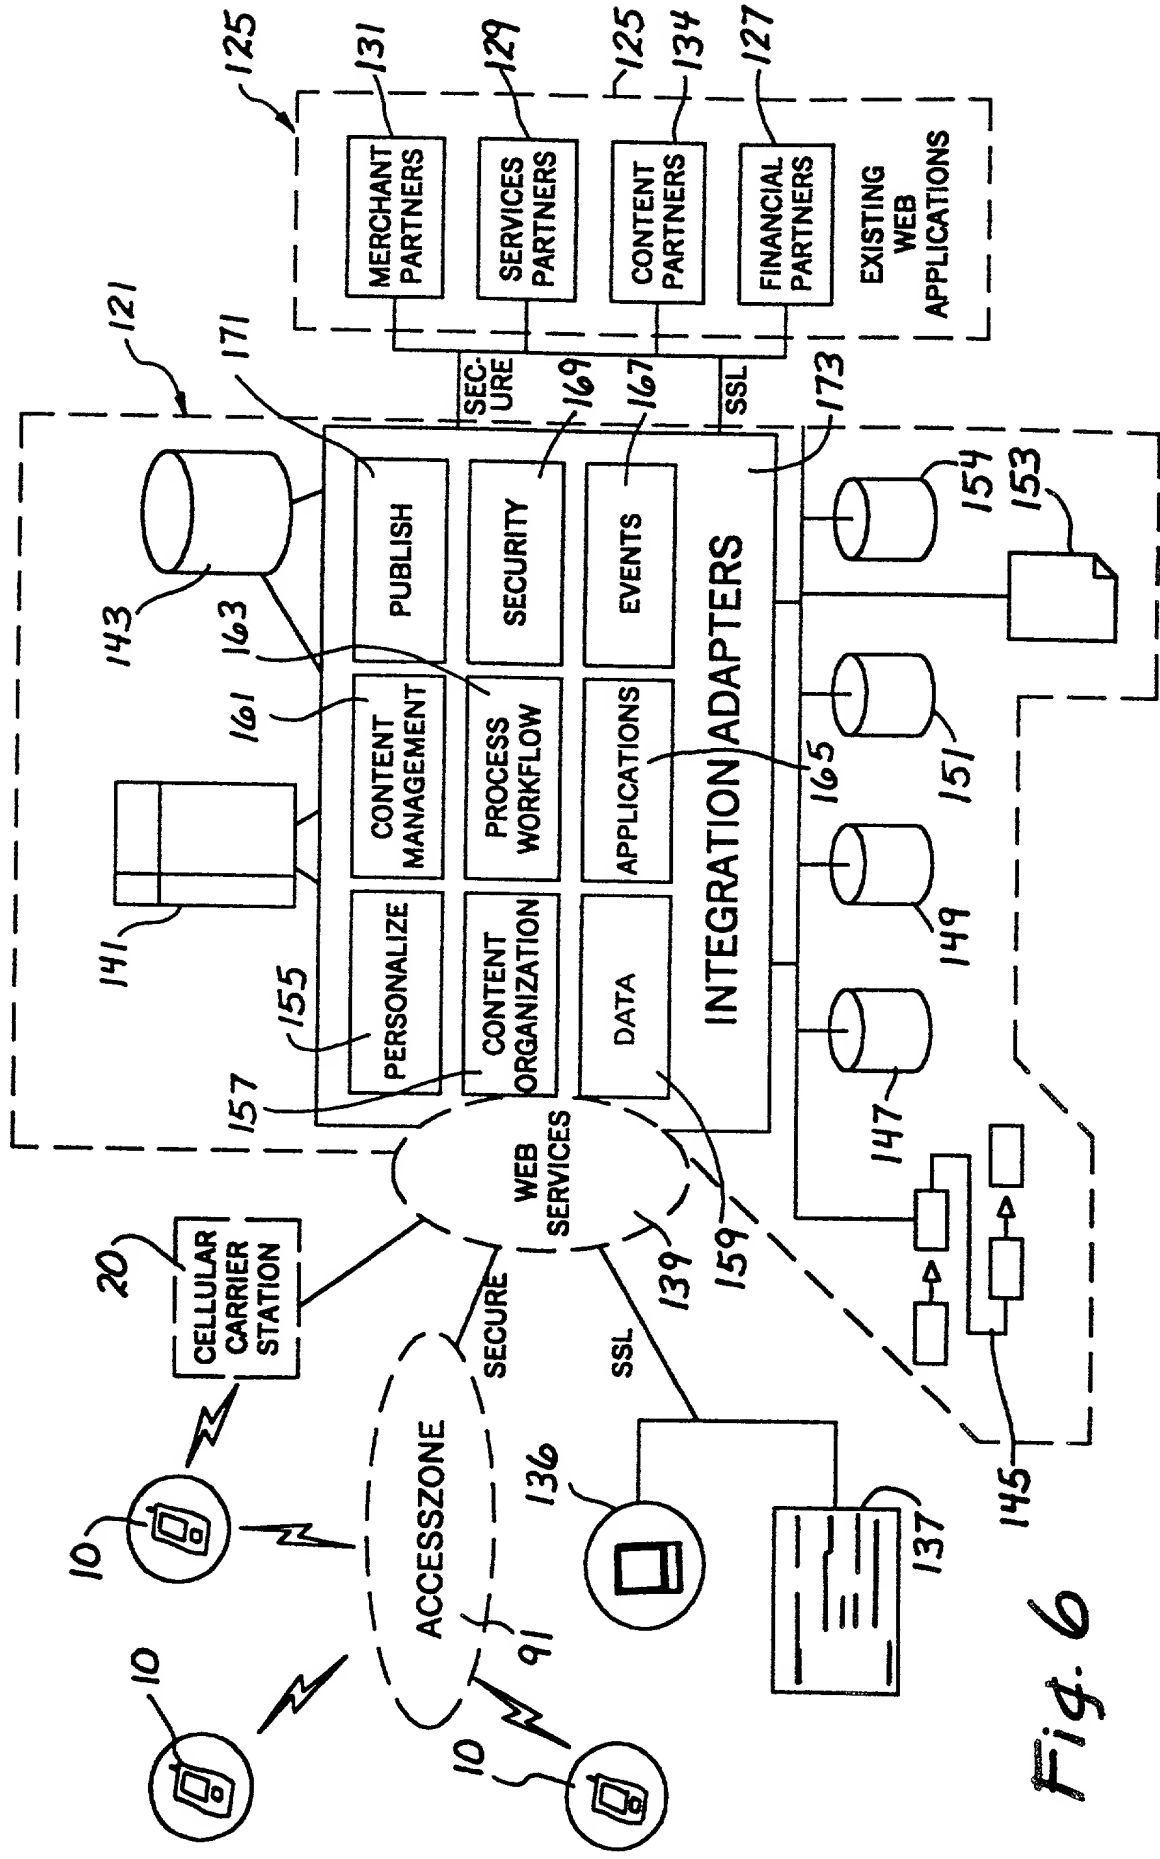


Fig. 6



Fig. 7

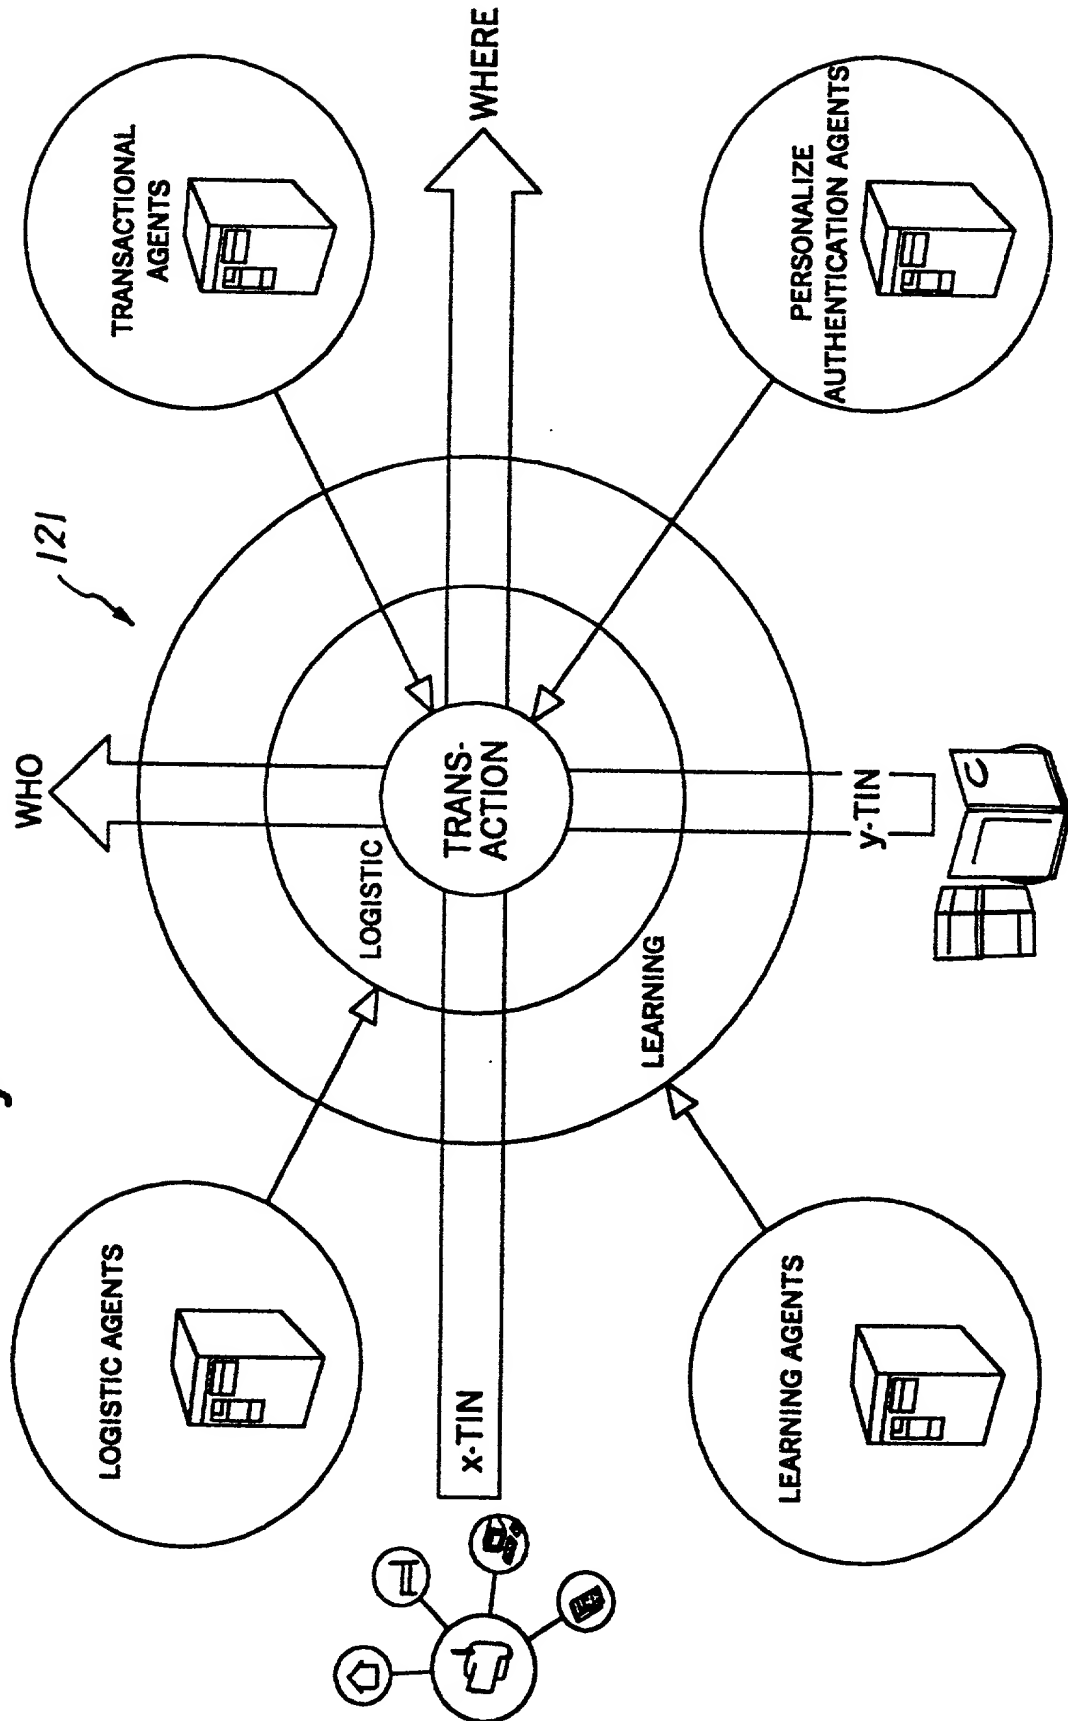


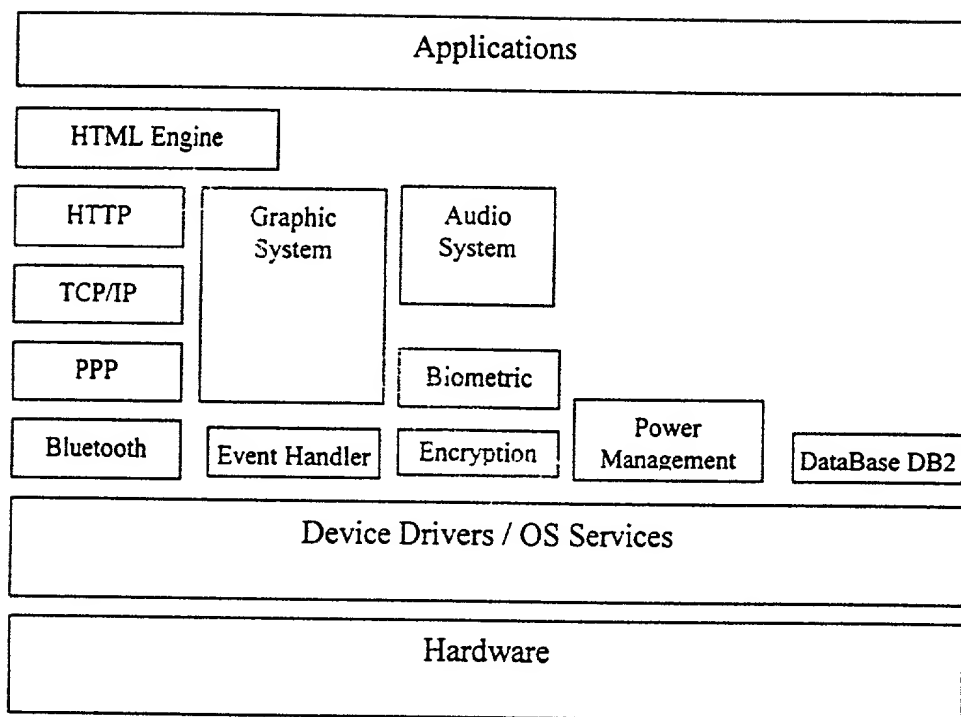


Simplified m-ENGINE™ Software Block Diagram

Fig. 8

Welcome Screen

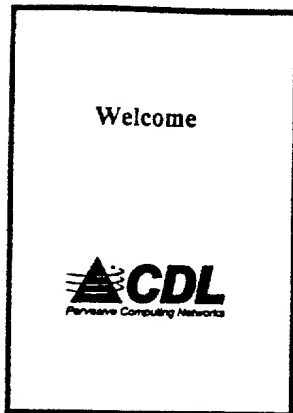

Calibration

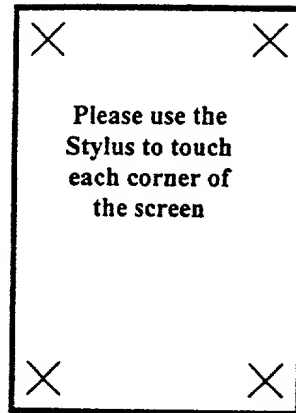

Personalization

A rectangular screen with a black border. It contains three input fields, each with a label to its left: "Title", "L Name", and "F Name". Each label is followed by a rectangular input box.

Figure 9

Please Enter Your  
PIN Number

A grid of buttons for entering a PIN. The buttons are arranged in four rows: the first row has "7", "8", "9"; the second row has "4", "5", "6"; the third row has "1", "2", "3"; and the fourth row has "0" and "Enter".

Picture  
Here

Mr. Copper

Figure 10

TIN is assigned

(CitiBank Logo)

Would you like to  
earn 5000 miles  
signing up for  
Travel Service?

Yes

No

(Travel Service  
Logo)

Figure 11



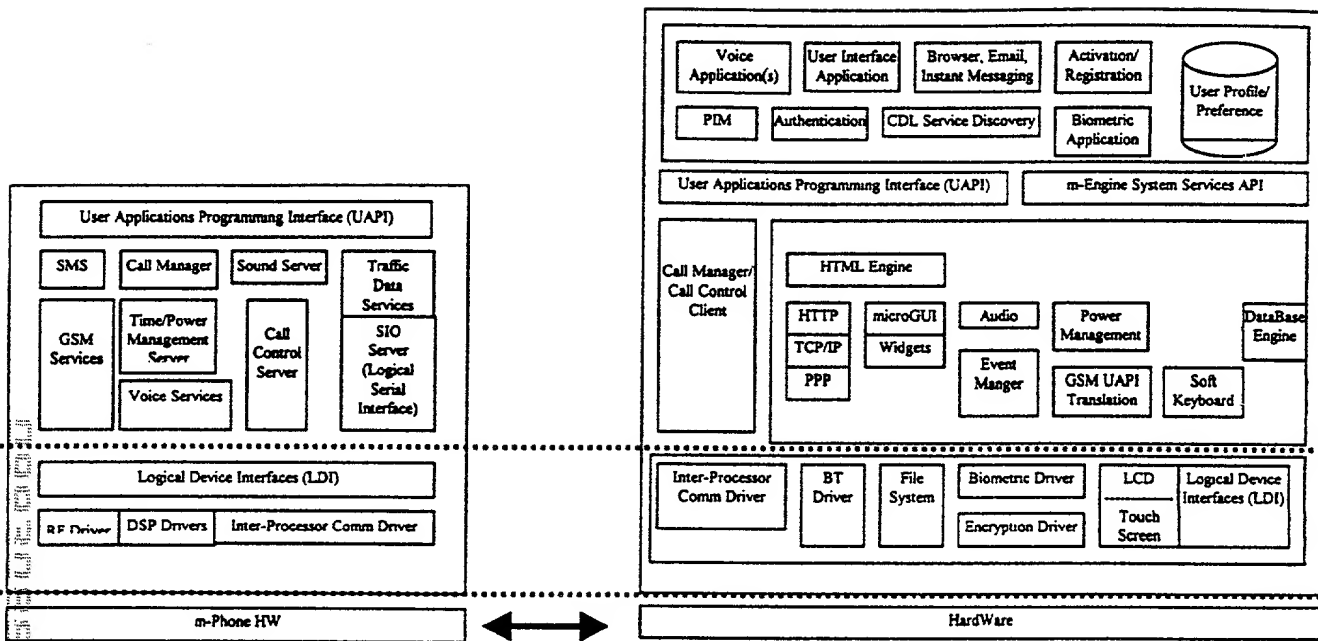


Fig. 12

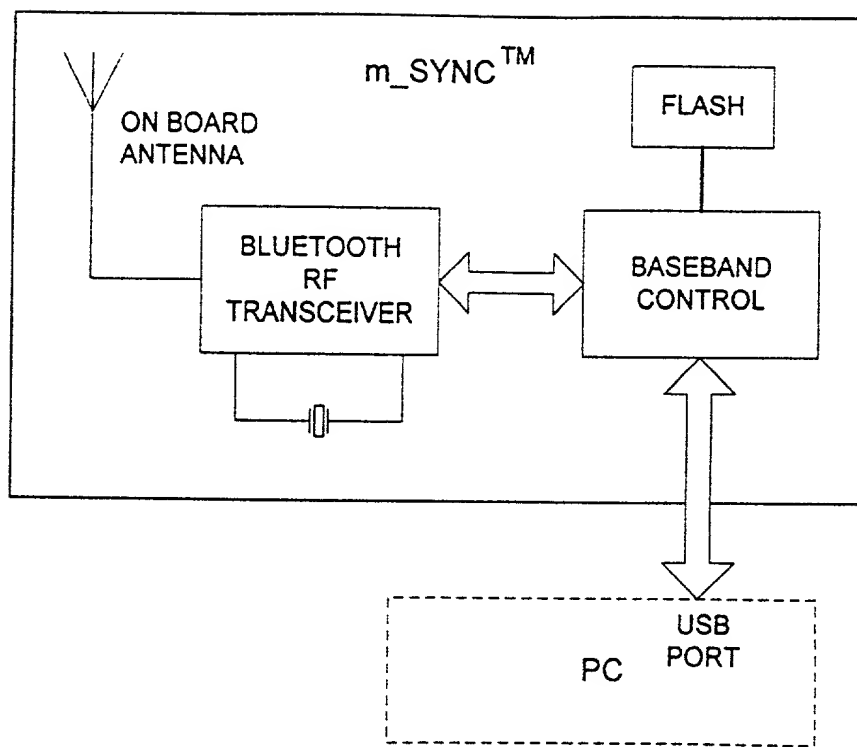


Simplified m-SYNC™ System Block Diagram.

Fig. 13

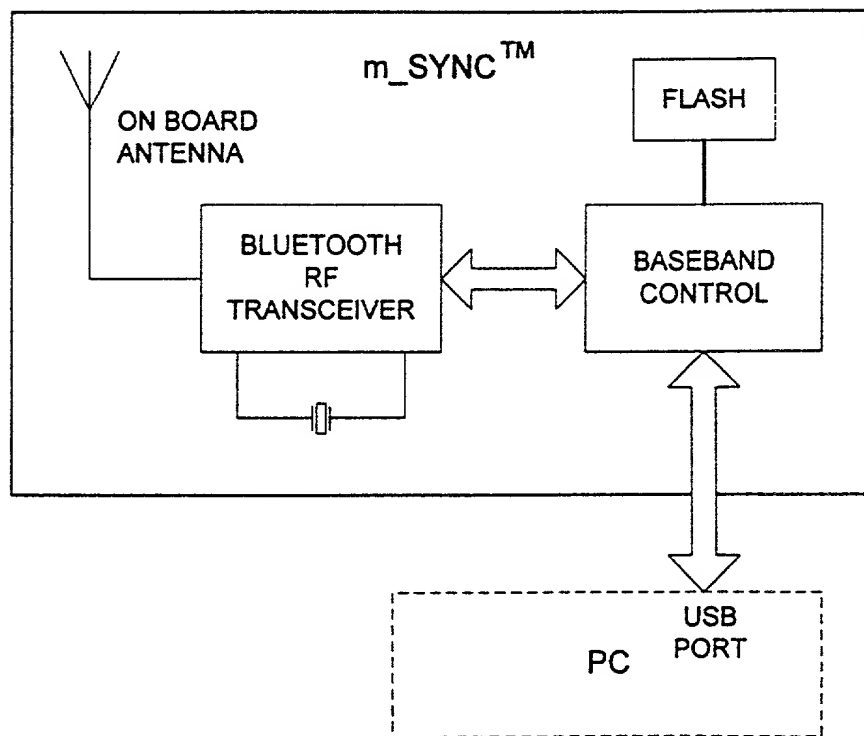


Simplified m-SYNC™ System Block Diagram.

Fig 14

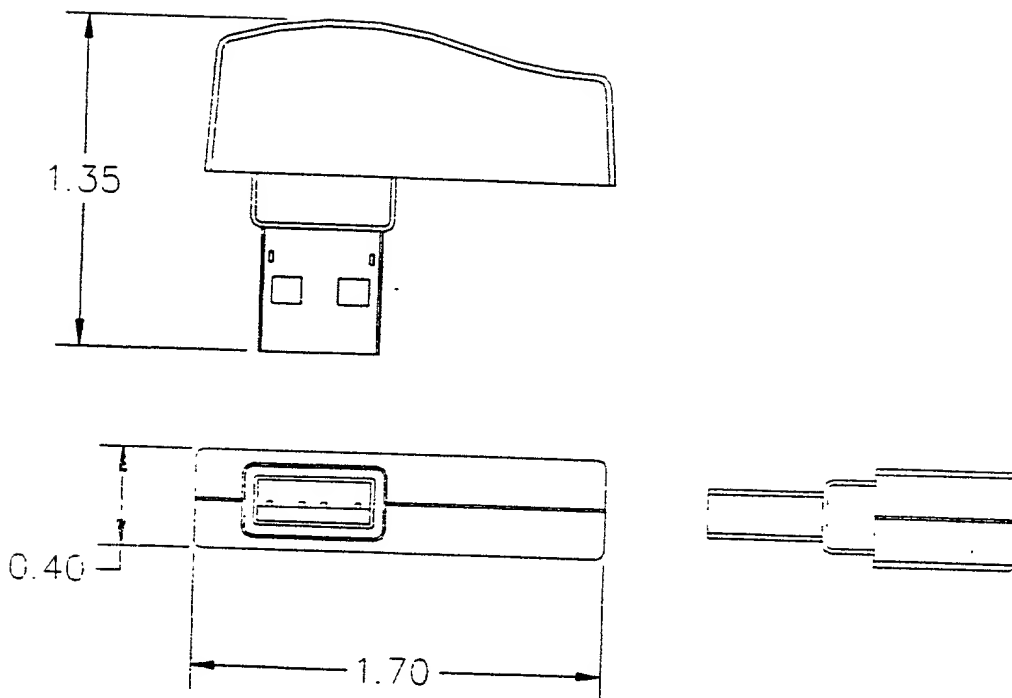

m-SYNC™ | External Dimension and Packaging

Fig. 15

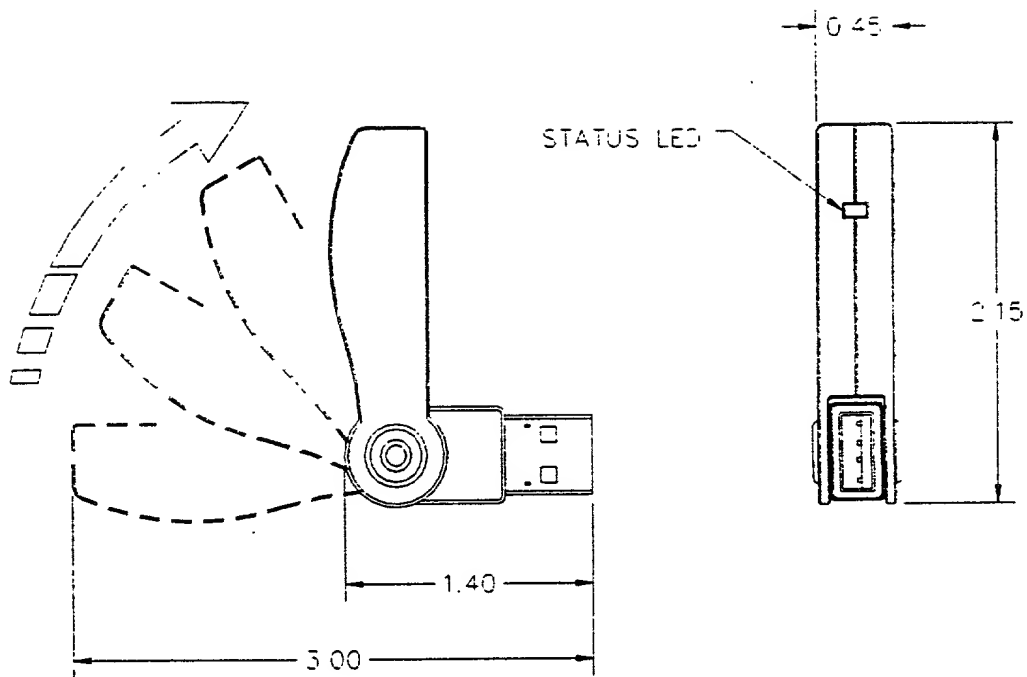


m-SYNC™ II External Dimension and Packaging

Fig. 16




## Bluetooth software/firmware block

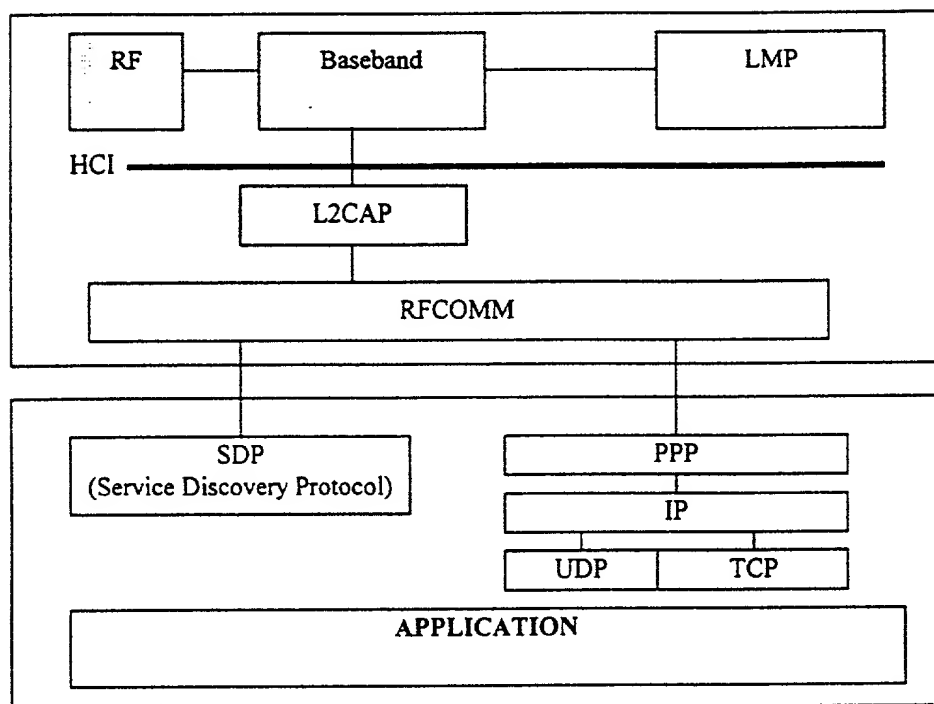

m-SYNC™


PC

Fig. 17

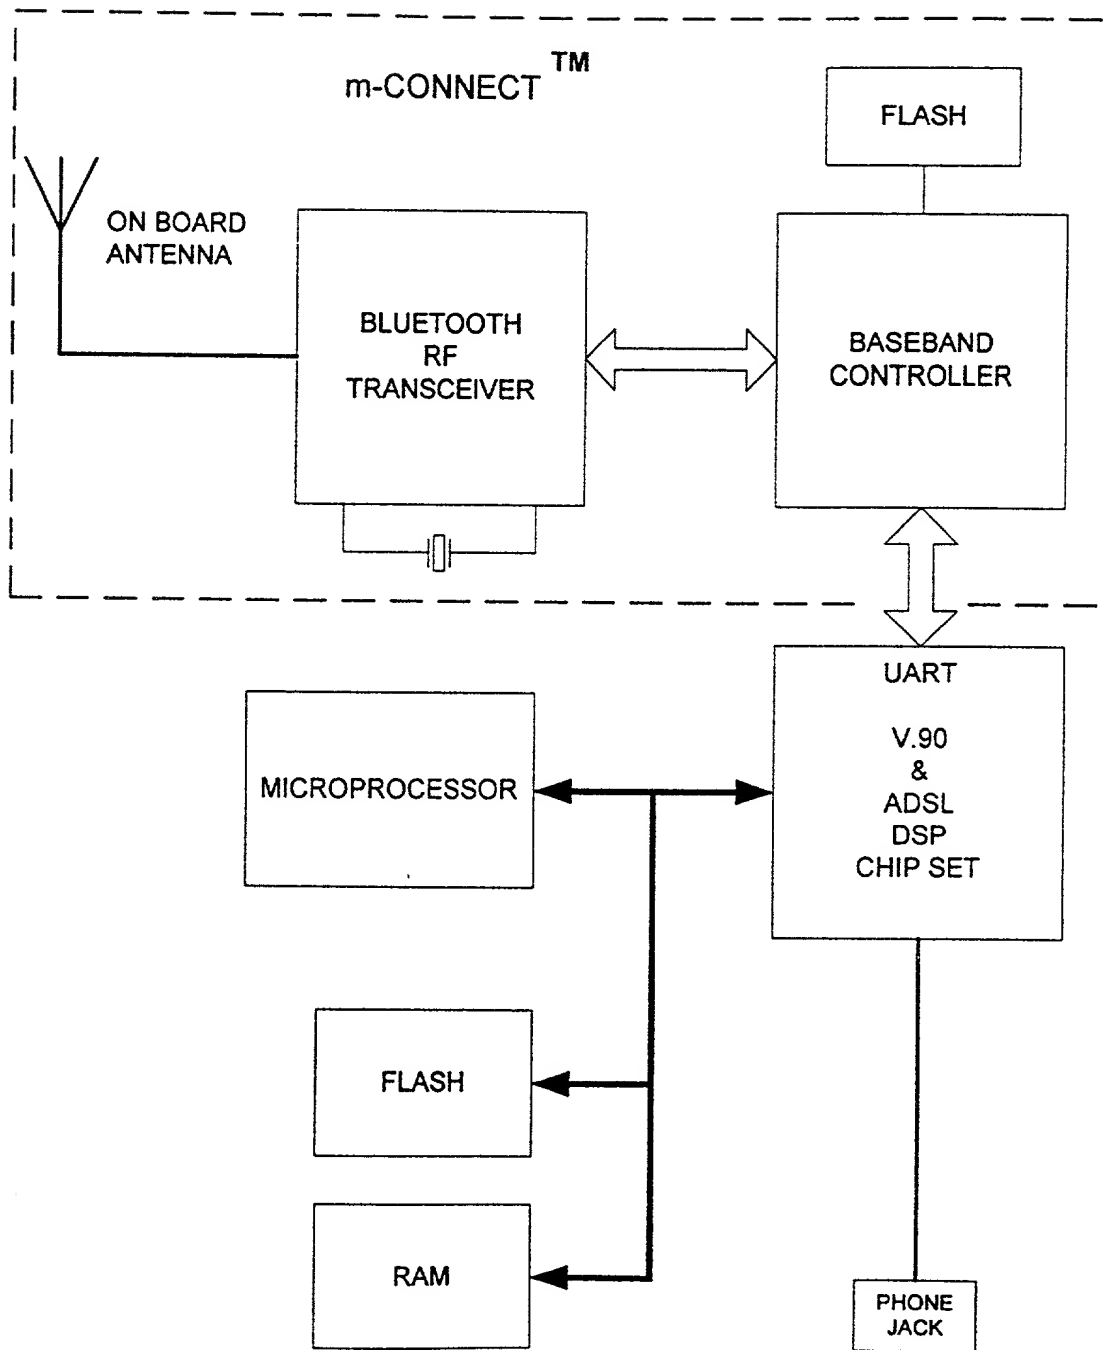


Simplified m-MODEM™ System Block Diagram.

Fig. 18

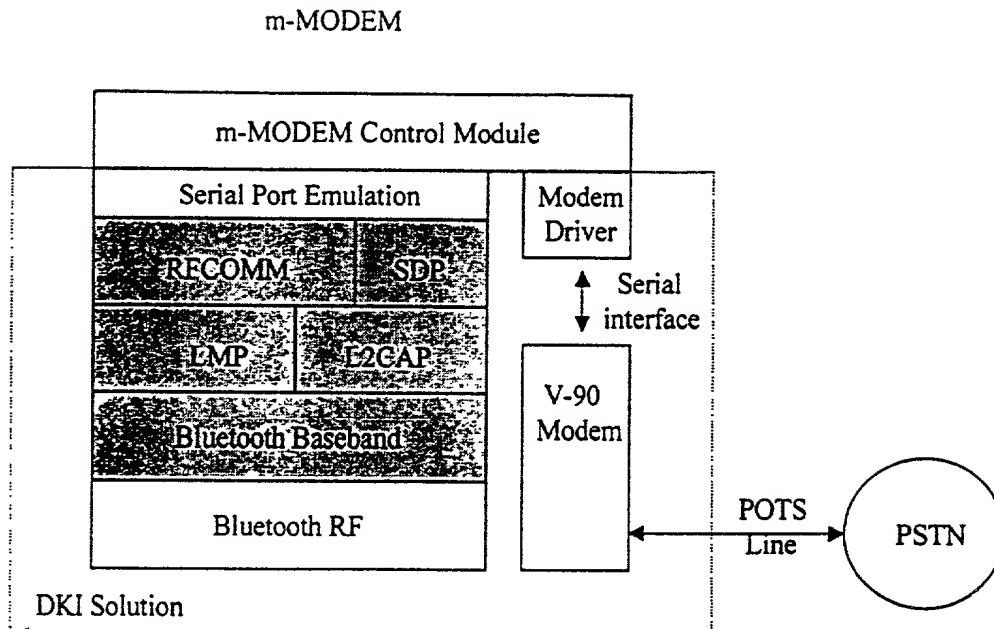


- Note: 1. Shaded area indicates the Bluetooth Serial Port Profile stack.  
 2. Area enclosed in the dotted line indicates the solution provided by DKI.

Fig. 19

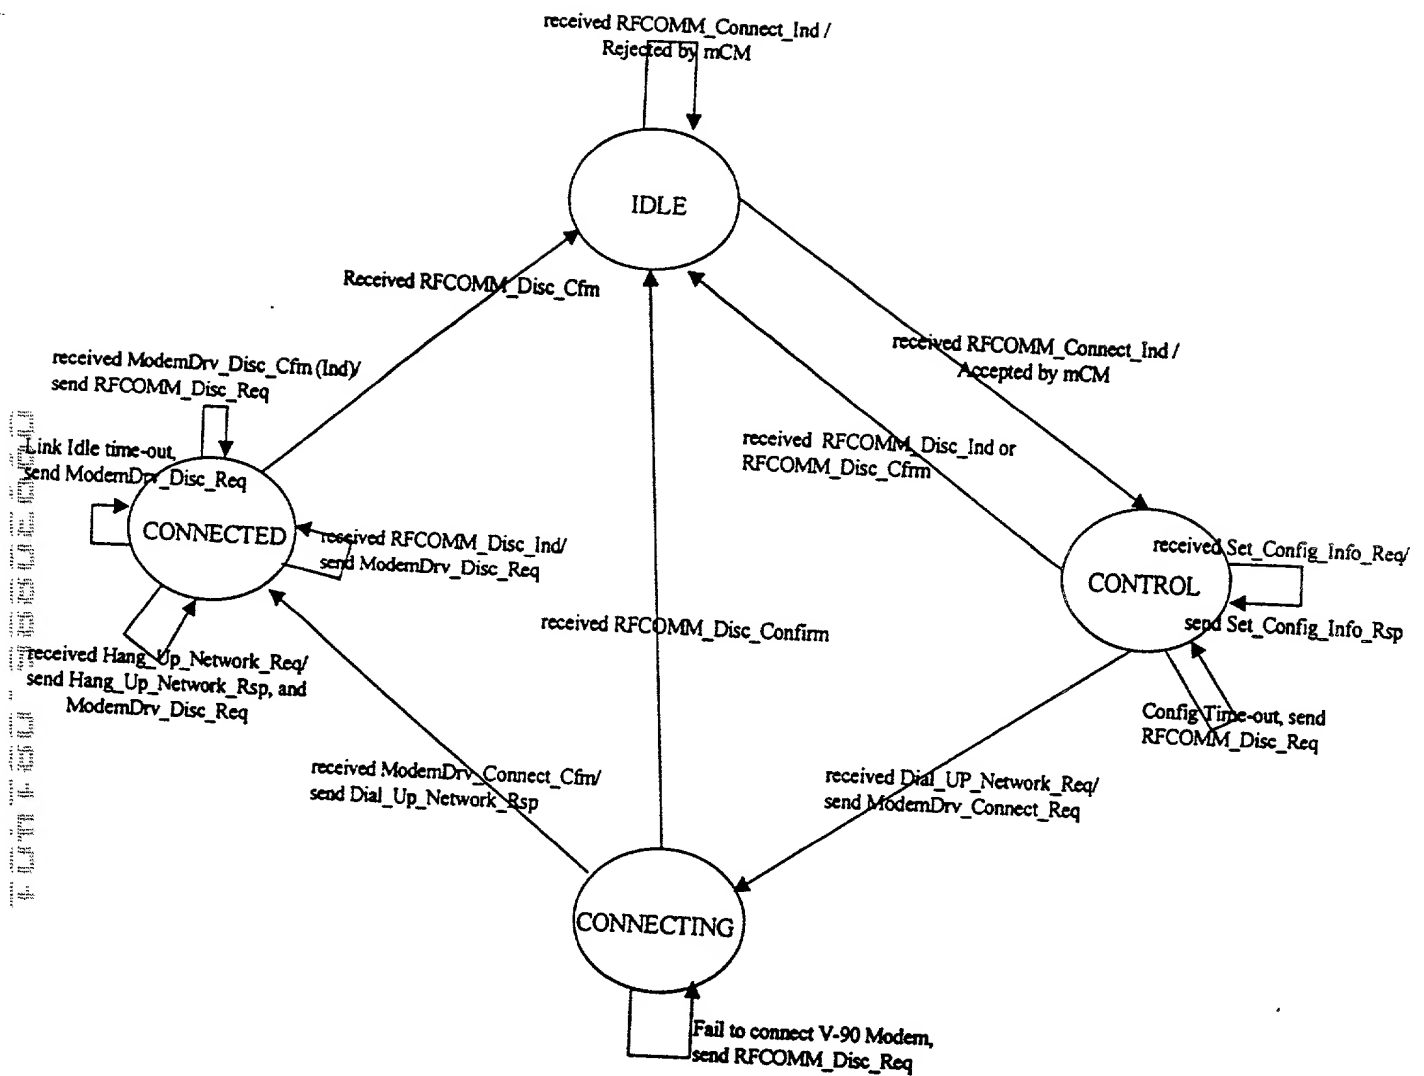

mCM State Transition Diagram

Fig. 20

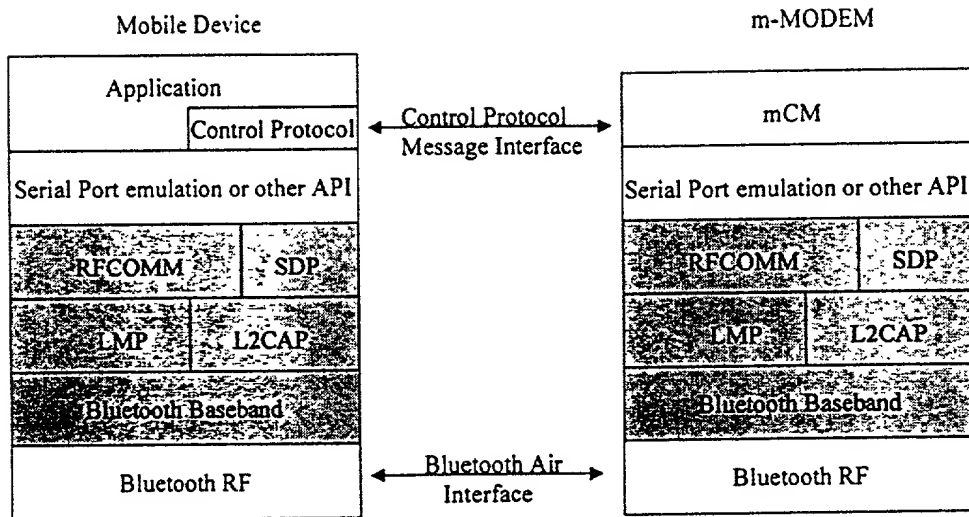

**mCM and Mobile Device Control Protocol interface**

Fig. 21